

Wireless IR Repeater System Model # INT-3856A-WRLS Contact us at: *Universalremotes.net*

(See Note under Troubleshooting about using DirectTV, Dish, Tivo and other SAT boxes)

Features:

- 1. Connect wired devices wirelessly using IR signals.
- 2. Control most home entertainment devices within hundreds of feet of open space.

Specifications:

IR (20-60kHz):

- 1. Works great with the *Inteset INT422* remote and most/all Universal full band carrier frequency infrared (IR) Remotes
- 2. Better IR Signal sensitivity creates improved signal distance


RF:

- 1. 915MHz RF technology built to ignore current 433MHz RF-interference (Base Units)
- 2. FSK modulation:
 - Better signal sensitivity than ASK modulation
 - Better Anti RF-interference than ASK modulation & Better noise suppression
- 3. Digital technology with frequency hopping to minimize RF-interference
- 4. Digital encrypted function to ensure privacy, safety and reliability
- 5. Power: 5VDC/500mA -You can use the adapter included or you can use a USB cable which we have available on Amazon-Contact us if you have any questions or cannot find the listing.

Kit Includes:

Switching	Dual IR Emitter cable	IR Receiver cable	IR Receiver Unit	IR Emitter Unit	User Manual
power supply	w/extra adhesive pads		Yellow Logo-Top	White Logo-Top	
Adapter			Yellow Print	White Print	RPTH Linearent Street Calabert

Setup Illustrations-Multiple Receiver and or Emitter units can be used in the same system

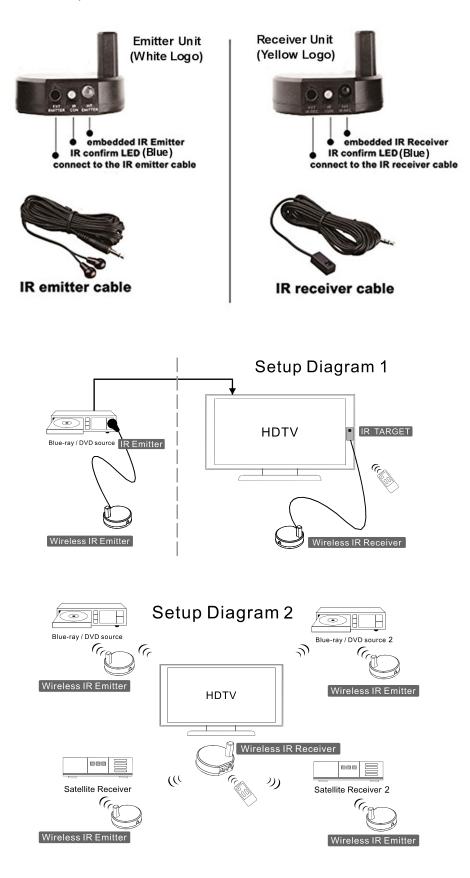

Additional IR Emitter Units available upon Request

Installation Steps

<u>Step1:</u> Place the IR Receiver Unit (Yellow Logo) and the IR Receiver Cable in your desired location (For Example: on or next to the bezel of your TV or Display).

<u>Step 2:</u> Place the IR Emitter Unit (White Logo) and IR Emitter Cable on the device(s) you want to control. (Cable box, STB, etc.). Press cables firmly into the base units. One of the emitter buds on the Emitter Cable should be placed directly on the IR sensor of the device(s) you want to control. <u>Step 3:</u> Plug the IR Receiver Cable into the jack on the <u>IR Receiver</u> Unit and plug the IR Emitter Cable into the jack of the IR Emitter Unit. Press in <u>FIRMLY</u>.

<u>Step 4:</u> Connect the 5v. power supply adapter to each unit where labeled "5VDC". Press in <u>FIRMLY</u>. Plug the power supply adapter into any 110v wall outlet. <u>*Tip: You can replace either*</u> <u>power adapter with a USB cable plugged into any USB jack. USB cables are available.</u> <u>Step 5:</u> Point the remote at the IR Receiver and press a button. The Blue LED should flash.

Troubleshooting

Issue	Problem	Solution
1	The "IR CON" (Confirm) LED doesn't	Make sure the power supplies are firmly plugged
	blink when I press the remote control.	into the IR Receiver and IR Emitter Units.
	Note: Dish, DirectTV, Tivo and some	Press a remote control button near the IR
	other SAT/Cable boxes use Radio	Receiver to see if the IR signal from the remote is
	Frequency(RF) remotes in some	received. The Blue LED will flash on both units.
	models of their products. Be sure that	
	you switch your box to IR, if that is the	There should be a clear line-of-sight to the IR
	case. This product only works with IR	Receiver Unit (<mark>Yellow Logo</mark>). Use the IR Receiver
	remotes and devices that accept IR	Cable and plug it into the "EXT IR REC" jack on
	<u>signals.</u>	the Receiver Unit and mount on your TV bezel.
	This device only uses RF between base units. It cannot communicate with RF devices other than our receiver and emitter units.	Make sure the IR Emitter Cable is connected to the "EXT IR EMITTER" jack on the IR Emitter Unit (White Logo). One of the two Emitter Buds of the IR Emitter Cable should be placed over the IR sensor of the device you want to control. (Cable Box, BR Player, etc.). After the system has been set-up, press a button on the remote control. The "IR CON LED" should
		flash Blue on both base units.

2	The IR CON LED, blinks upon receiving a signal from the remote control, but the target device does not react as expected. Note: The blue LED on each unit should blink once when first plugged into the power cable.	Make sure the embedded IR Emitter in the base Unit (White Logo) is pointing directly at the IR sensor in the target device which you want to control. (Cable Box, BR Player etc). If using the IR Emitter Cable. It should be connected to the "EXT EMITTER" jack and one bud on the other end should be directly on top of the IR sensor in the device that you want to control. Be sure the signal from the remote is not blocked and that the emitter cable plug is pressed firmly into the Emitter Unit.
		Make sure the IR Receiver Cable is connected to "EXT IR REC" jack of the IR Receiver Unit. When the system has been set-up, press a button on your remote control. The IR signal should control the target device and the IR LED on both base units should flash Blue.
3	The distance between remote control and IR Receiver is short (less than 15 feet)	Be sure the batteries in the remote control are good- replace the batteries in your remote. Be sure that the Emitter bud is directly over the IR sensor of the target device (Cable box etc.).
4	The target device does not work after setting up the wireless IR system.	This system will <u>not work</u> with very few devices. See the list of those devices in the listing.
5	I have connected the units the way the user manual instructs, but I still cannot get this kit to work.	Any kind of thick or dense material such as concrete, wood or metal can affect the signal. Try relocating one of the units closer to the other to test if the system works. If it does, you will need to relocate the device(s) you want to control.
6	The manual says it can work "up to hundreds of feet of open space". Why is it less than 100 feet in my installation?	"Open space" means there's nothing between the IR Receiver and IR Emitter Units. The useful distance is greatly reduced by furniture, walls and floors especially in construction or materials where metal or stone is used.